



INSTALLATION GUIDE

PCV Side Baffled Oil Catch Can, Fits 2022+ Honda Civic Si
SKU: MMBCC-CIV-22P

TABLE OF CONTENTS

1. RESOURCES & CONTACT INFO
2. IMPORTANT SAFETY INFORMATION
INSTALL TIME & DIFFICULTY
SUPPLIED PARTS
REQUIRED TOOLS
5. DISPOSAL & WARRANTY INFORMATION

RESOURCES & CONTACT



CALL 1.877.466.4744

CUSTOMER SERVICE HOURS: MON-FRI 8:30AM-5:00PM EST



@MISHIMOTO



@GOMISHIMOTO



MISHIMOTO



@MISHIMOTO



ENGINEERING BLOG

WWW.MISHIMOTO.COM/ENGINEERING

IMPORTANT SAFETY INFORMATION

- › Mishimoto recommends you use safety glasses and protective gloves during the installation of our products
- › Raise vehicle only on jack stands or on a vehicle lift
- › Allow vehicle to cool completely prior to attempting installation
- › Do not run the engine or drive the vehicle while overheating; serious damage can occur
- › Please dispose of any liquids properly
- › Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- › If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-GOMISHI

SUPPLIED PARTS

- | | |
|---------------------------------|------------------------|
| (1) MISHIMOTO BAFFLED CATCH CAN | (3) M4 BOLTS |
| (2) CATCH CAN FITTINGS | (1) SPLIT HOSE |
| (1) MOUNTING BRACKET | (2) HOSE CLIPS |
| (2) CATCH CAN HOSES | (2) TREE CLIP ZIP TIES |
| | (4) WORM GEAR CLAMPS |

REQUIRED TOOLS

- | | |
|------------------|----------------------|
| SOCKET DRIVER | 2.5MM ALLEN KEY |
| SOCKET EXTENSION | 17MM WRENCH |
| 7MM SOCKET | FLATHEAD SCREWDRIVER |
| 10MM SOCKET | |

INSTALL TIME: 30 MINUTES


INSTALL DIFFICULTY:     

INSTALLATION INSTRUCTIONS


1. Using a 17mm wrench, install the catch can fittings into the threaded ports on the catch can lid.



2. Using a pair of needle nose pliers, compress the spring clamps on each end of the stock PCV hose and remove it from the vehicle.

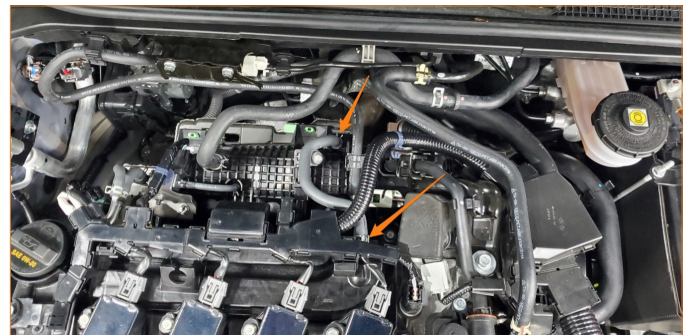


3. Using a 10mm socket, remove the two (2) nuts and one (1) bolt securing the front part of the two-piece fuel hose bracket on the firewall. Remove the front part of the bracket to gain access to the bolts securing the rear part of the bracket to the vehicle.

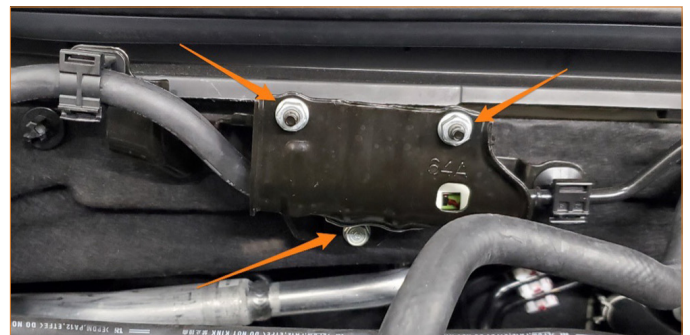


Continued on next page


4. Using a 10mm socket, remove the two (2) bolts securing the rear part of the fuel hose bracket to the vehicle.

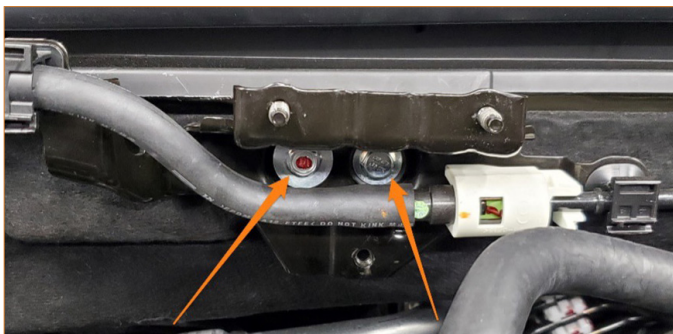


5. Install the catch can bracket behind the rear part of the fuel hose bracket and secure both brackets with the bolts that were removed in the previous step.

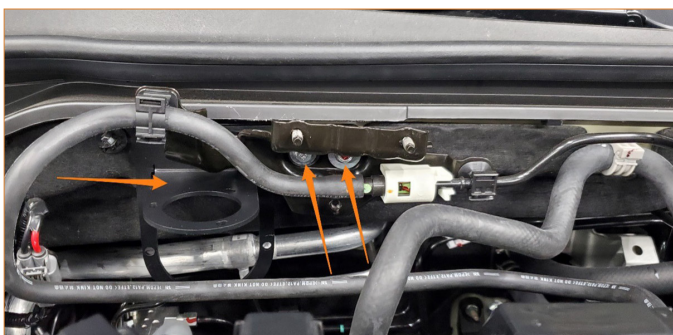


6. Place the split hose over the stock fuel hose that runs in front of the catch can bracket. Use the two (2) supplied tree clip zip ties to secure the fuel hose to the catch can bracket, as shown in the photo below.

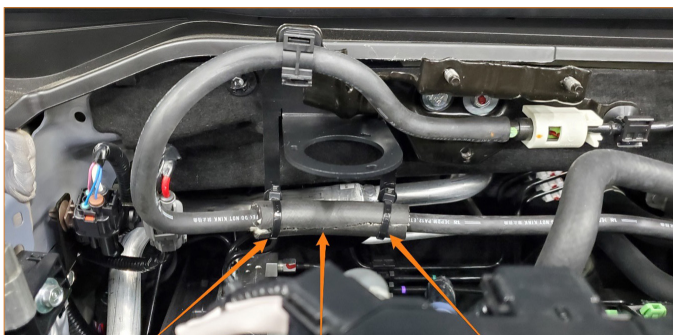

7. Using a 10mm socket, reinstall the front part of the stock bracket with the two (2) nuts and one (1) bolt that were removed in Step 2.

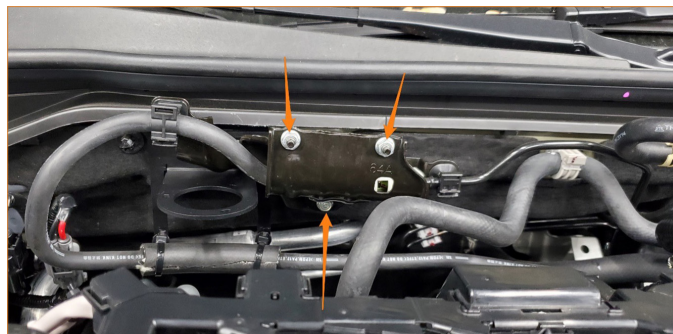

8. Using a 2.5mm Allen key, attach the Mishimoto catch can to the catch can bracket with the three (3) supplied M4 bolts.

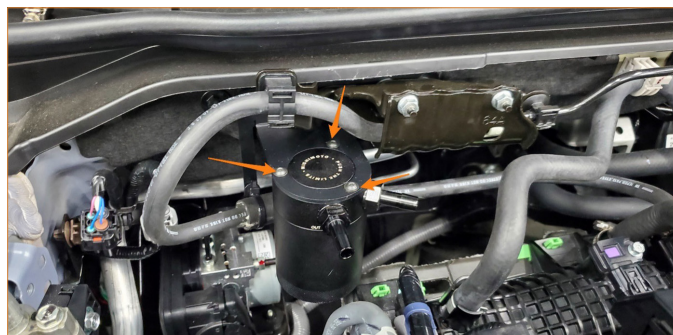


9. Install the shorter end of the supplied bent hose to the port on the catch can labeled "OUT" and secure it with one (1) of the supplied worm gear clamps. Install the other end of this hose to the port on the intake manifold and secure it with one (1) of the supplied worm gear clamps. The worm gear clamps can be tightened using a 7mm socket or a flathead screwdriver.




Continued on next page

10. Install one end of the supplied straight hose to the port on the catch can labeled "IN" and secure it with one (1) of the supplied worm gear clamps. Install the other end of this hose to the PVC port on the valve cover and secure it with one (1) of the supplied worm gear clamps. The worm gear clamps can be tightened using a 7mm socket or a flathead screwdriver.

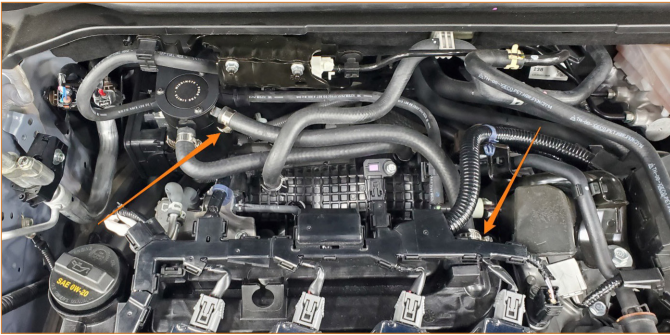

11. Use the two (2) supplied hose clips to separate the hoses and keep them from rubbing on one another, as shown in the photo below.

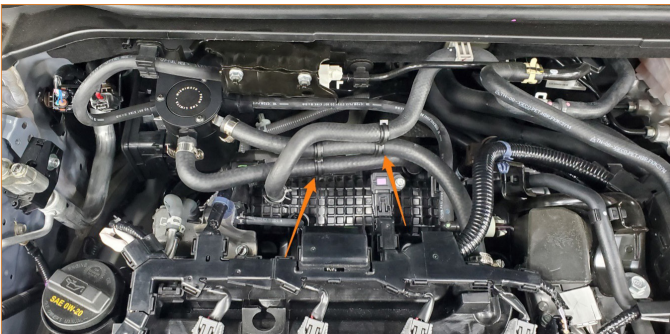

Congratulations! You have completed the installation.

Continued on next page

DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals

WARRANTY INFORMATION



- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.
- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.
- › Any product deemed dead on arrival (DOA) must be claimed within 14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.
- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.

- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product; (ii) replace purchaser's original Mishimoto product with the most current available model; or (iii) provide the purchaser with a gift card redeemable on **Mishimoto.com** in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Borne Off-Road retains the right to substitute any warranty claim item with a comparable item or credit at any time.
- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



WARNING
Cancer and
Reproductive Harm
www.P65Warnings.ca.gov

- › This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit:
www.p65warnings.ca.gov